

## LED Multi-Line Message Centers

Up to 5 lines of Text

*6 to 48 Characters*

### EDV111 Series

EDV111-32240-MC



These multi-line, tri-color message centers are indoor rated and display 1.4", 2.0", 3.0", 4.4" and 7" high characters. They can be controlled using PC software provided or an easy-to-use infrared remote programmer. An optional Ethernet device can be used to network the displays into a facility wide communication system. When networked, individual message centers with a specific address can receive a discrete message or a general broadcast message can be sent to all the message centers in the network.

Included are brackets and hardware that allow for wall or ceiling mounts. The message centers are designed for indoor use in an industrial, retail, government and educational facility or anywhere communication is important. These units can display production goals, company announcements, safety messages and boost employee moral. They can be used in a retail environment to inform customers of product specials, store hours and promotions. Educational facilities can display facility meetings, school activity schedules and student messages.

#### Hand Held Remote Programmer

A hand held remote control keyboard with easy to understand programming instructions is supplied with each EDI Message Center. Batteries included.

#### Models Include

- Infrared message loader with battery
- Wall or ceiling mount bracket
- 30 ft. RS232 data cable
- PC software

#### Accessories

- Ethernet communication device ED2160

#### FEATURES


- Stores up to 100 messages
- 100,000 Hr. multi-color LED lamp technology
- Display one line to five lines of text
- Built-in animations
- Built in real-time clock, 12 or 24 hour format
- Addressable
- Password protected
- Wireless remote
- 30 ft. RS232 data cable
- Mounting brackets
- Four display speeds
- 5mm pixel diameter
- 160 degree viewing angle
- Runs on Windows 98/2000/XP
- 120 VAC power supply
- Battery backup saves messages up to 6 months

# MESSAGE CENTERS & ANNUNCIATORS

Electronic Displays, Inc.



## TECHNICAL INFORMATION

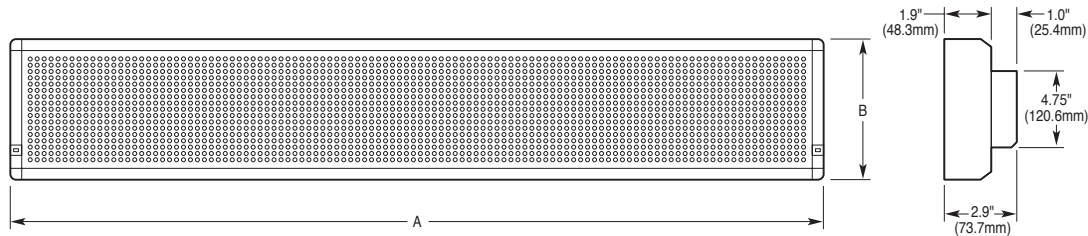

Part No.	EDV111-3280-MC	EDV111-32120-MC	EDV111-32160-MC	EDV111-32240-MC	EDV111-32320-MC
<b>Dimension A</b>	26" (660.4mm)	40" (1016mm)	49" (1320.8mm)	73" (1854.2mm)	96" (2438.4mm)
<b>Dimension B</b>	11" (279.4mm)	11" (279.4mm)	11" (279.4mm)	11" (279.4mm)	11" (279.4mm)

Cat. No.	Power	No. of Characters/Line (max.)	Character size Array	Pixel Size Diameter Pixel Pitch	Pixel Color	Weight	Max. viewing distance w/largest font*	Message Capacity	Operating Environment	Case Dimensions / Display Dimensions
EDV111-3280-MC	120V AC ± 10% 40 watt max.	One line 6 Two line 6 Four line 10 Five line 12	1 line 4.4"/7.0" 2 line 3.0" 4 line 2.0" 5 line 1.4" Array 32 x 80 pixels	.2" (5mm) .08" (20mm)	8 colors and 5 rainbow effects	24 lbs.	350 ft.	100 different messages can be stored & displayed, 28,000 characters	32-120°F 0-95% relative humidity non-condensing	26"L 3"D 11"H/ 9.5"H 24.4"L
EDV111-32120-MC	120V AC ± 10% 40 watt max.	One line 13 Two line 13 Four line 20 Five line 24	1 line 4.4"/7.0" 2 line 3.0" 4 line 2.0" 5 line 1.4" Array 32 x 120 pixels	.2" (5mm) .08" (20mm)	8 colors and 5 rainbow effects	33 lbs.	350 ft.	100 different messages can be stored & displayed, 28,000 characters	32-120°F 0-95% relative humidity non-condensing	40"L 3"D 11"H / 9.5"H 38.4"L
EDV111-32160-MC	120V AC ± 10% 40 watt max.	One line 12 Two line 12 Four line 20 Five line 24	1 line 4.4"/7.0" 2 line 3.0" 4 line 2.0" 5 line 1.4" Array 32 x 160 pixels	.2" (5mm) .08" (20mm)	8 colors and 5 rainbow effects	49 lbs.	350 ft.	100 different messages can be stored & displayed, 28,000 characters	32-120°F 0-95% relative humidity non-condensing	49"L 3"D 11"H / 9.5"H 47.4"L
EDV111-32240-MC	120V AC ± 10% 50 watt max.	One line 26 Two line 26 Four line 40 Five line 48	1 line 4.4"/7.0" 2 line 3.0" 4 line 2.0" 5 line 1.4" Array 32 x 240 pixels	.2" (5mm) .08" (20mm)	8 colors and 5 rainbow effects	65 lbs.	350 ft.	100 different messages can be stored & displayed, 28,000 characters	32-120°F 0-95% relative humidity non-condensing	73"L 3"D 11"H / 9.5"H 71.4"L
EDV111-32320-MC	120V AC ± 10% 100 watt max.	One line 24 Two line 24 Four line 40 Five line 48	1 line 4.4"/7.0" 2 line 3.0" 4 line 2.0" 5 line 1.4" Array 32 x 320 pixels	.2" (5mm) .08" (20mm)	8 colors and 5 rainbow effects	81 lbs.	350 ft.	100 different messages can be stored & displayed, 28,000 characters	32-120°F 0-95% relative humidity non-condensing	96"L 3"D 11"H / 9.5"H 94.4"L

\*Seven fonts available including wide, bold and international character sets.

Electronic Displays, Inc.



135 S. Church Street • Addison, IL 60101

Phone: 630-628-0658 • Toll-Free: 800-367-6056 • Fax: 630-628-0936

[www.electronicdisplays.com](http://www.electronicdisplays.com)